

### 3dBi Indoor Swivel Omni Antenna for 2.4~2.5GHz, for WiFi 802.11b/g/n Application, SMA-Plug (male)




Features & Applications	
<ul style="list-style-type: none"> <li>• 802.11b/g/n/MIMO bands enabled.</li> <li>• High throughput results on indoor AP.</li> <li>• 3dBi gain value for indoor device available.</li> </ul>	
<ul style="list-style-type: none"> <li>• Suit for Access Point, Router, Wireless XDSL modem, media adapter of extended wireless coverage.</li> <li>• Cover WiFi 2.4GHz proprietary wireless indoor projects.</li> <li>• 1x1/2x2/3x3 MIMO technologies enabled.</li> </ul>	

Electrical Specifications	
Frequency Range:	2.4~2.5GHz
Peak Gain:	3 dBi typ.
VSWR:	2.0:1 max.
Impedance:	50 Ω
Polarization:	Linear, Vertical
BW/Azimuth:	360 °
BW/Elevation:	50 °
Front to Back Ratio:	N/A
Max. Power Input:	10 W
Connector:	SMA Plug (male)

Mechanical Specifications	
Dimensions:	φ 13xL156 mm
Weight:	18 g
Color:	Black
Mounting:	Direct mount
Accessories:	N/A
Wind Speed Load:	N/A
Temperature:	-30°C ~ +70°C
Waterproof:	N/A
Radome Material:	ABS
Warranty:	1 Year



Vertical Plane Patterns

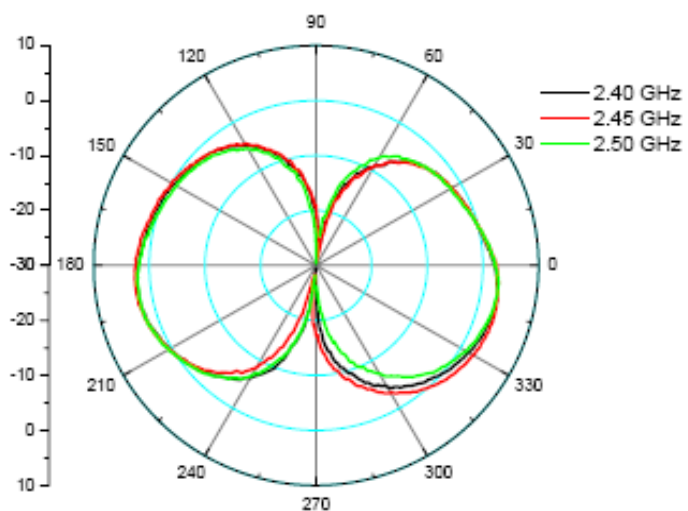

Horizontal Plane Patterns

